



要效益 找具力
GETTING EFFECTIVENESS, GO TO JULI



2026版



明效设计 13662873321



具力机械(香港)有限公司
JULI MECHANICAL (HK) CO., LTD.

东莞市具力自动化设备科技有限公司
DONGGUAN JULI AUTOMATIC EQUIPMENT TECHNOLOGY CO., LTD.

地址：广东省东莞市厚街镇寮厦彩云东路3号
ADD: No. 3, Caiyun East Road, Liaoxia, Houjie Town,
Dongguan City, Guangdong Province
电话 (TEL) : 86-769-85877871
传真 (FAX) : 86-769-85877871-810
邮箱 (E-mail) : 3004493900@qq.com
网址 (Web) : <http://julizdh.com>

具力机械(香港)有限公司
JULI MECHANICAL (HK) CO., LTD.
东莞市具力自动化设备科技有限公司
DONGGUAN JULI AUTOMATIC EQUIPMENT TECHNOLOGY CO., LTD.



>> > COMPANY PROFILE

公司简介


东莞市具力自动化设备科技有限公司成立于2011年，坐落于东莞厚街，是一家集研发、生产、销售、服务于一体的专业自动化设备制造商。公司深耕皮具、手袋、箱包、鞋业、礼品盒等行业，致力于为客户提供高效、稳定、智能的自动化解决方案。公司始终将产品质量作为企业发展的生命线，建立严格的生产管控、精密检测与品质保障体系，每一台设备均经过多重测试与验证，确保稳定耐用、精度高、故障率低。同时，公司打造专业高效的售前、售中、售后全流程服务团队，快速响应客户需求，提供安装调试、操作培训、售后维护等一站式支持，让客户用得安心、省心。凭借持续的技术创新，公司已拥有全自动边机、视觉喷胶机、高周波自动电压机、数控涂胶机、热熔胶机、红外线烤箱等多项国家专利技术，核心产品性能达到行业先进水平。目前，公司已成为 Coach、MK 等国际知名品牌供应链的合格供应商，帮助客户显著提升生产效率、降低人工成本，以过硬品质与优质服务赢得海内外客户的高度认可与长期信赖。

Dongguan Juli Automation Equipment Technology Co., Ltd., established in 2011 and based in Houjie, Dongguan, is a professional manufacturer of automation equipment integrating R&D, production, sales and service. The company focuses on industries such as leather goods, handbags, luggage, footwear and gift boxes, and is committed to providing customers with efficient, stable and intelligent automation solutions.

The company always regards product quality as the lifeline of enterprise development, and has established a strict production control, precise testing and quality assurance system. Every piece of equipment undergoes multiple tests and verifications to ensure stability, durability, high precision and low failure rate. At the same time, the company has built a professional and efficient whole-process service team covering pre-sales, in-sales and after-sales, responding quickly to customer needs and providing one-stop support including installation, commissioning, operation training and maintenance, making customers feel assured and convenient.

With continuous technological innovation, the company has obtained a number of national patents covering automatic edge painting machines, visual glue spraying machines, automatic high-frequency voltage machines, CNC glue applicators, hot melt glue machines, infrared ovens and other products. The performance of core products has reached the advanced level in the industry.

At present, the company has become a qualified supplier to world-famous brands such as Coach and MK, helping customers significantly improve production efficiency and reduce labor costs. With excellent quality and professional service, Juli has won high recognition and long-term trust from customers at home and abroad.

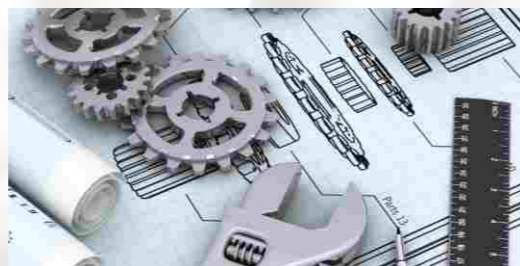

>> > THE COMPANY HONOR

公司荣誉





JL-Y4040C 双头自动油边机（适用异形复杂材料）

JL-Y4040C Double-head Automatic Edge Painting Machine (Suitable for complex and irregular materials.)



——专利产品 仿冒必究——

JL-Y7045B 双头自动油边机（适用中等尺寸材料）

JL-Y7045B Double Head Automatic Edge Painting Machine (for Medium-sized General workpieces)



——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 适用于手袋、鞋业、皮具、手机配件等相关行业材料油边，适配异形复杂材料

工作范围: 最小材料10mm*20mm，最大材料400mm*400mm，双件同时油边170mm*400mm，四件同时油边70mm*400mm

核心优点:

1. 双料仓交替上料设计，一仓工作一仓备用，可提前摆料，实现设备连续自动加工，无停机等待；
2. 搭载视觉定位系统，摄像头自动捕捉加工件的轮廓，减少绘图误差，提升换款效率，节省调机时间与成本；
3. 油边夹具可自由调节，适配不同尺寸/形状材料，工作范围内无需更换夹具，操作简单便捷；
4. 支持油轮、油带两种油边模式，满足多样化工艺需求；
5. 单人可操作1-2台设备，单件油边耗时6-10s，生产效率显著提升；
6. 多轴控制系统+伺服电机驱动，运行平稳可靠，油边质量高，降低返工率；
7. 适配异形复杂材料油边（拉链窗口、耳仔配件、链尾等），适用范围广；
8. 双机械手交替油边，设备无停机作业，单台可节省人工3-5人；
9. 红外线旋转烤箱+智能温控，烘干效果佳、效率高，自动下料，进一步降低人工成本。

Main application: Suitable for edge painting of materials in handbag, footwear, leather goods, mobile phone accessories and other related industries, and adapted to special-shaped and complex materials.

Working Range: Minimum size of workpiece: 10mm*20mm; Maximum size of workpiece: 400mm*400mm; Maximum size for two workpieces at the same time: 170mm*400mm; Maximum size for four workpieces at the same time: 70mm*400mm.

Main advantages:

1. Adopts a double material bin alternate feeding design, one bin works and the other is for standby. Materials can be placed in advance to realize continuous automatic processing of the equipment without shutdown waiting.
2. Equipped with a visual positioning system, the camera automatically captures the contour of the workpiece, reducing drawing errors, improving style change efficiency, and saving debugging time and cost.
3. The edge painting fixture can be adjusted freely, suitable for materials of different sizes and shapes. No need to replace the fixture within the working range, with simple and convenient operation.
4. Supports two edge painting modes of oil wheel and oil belt to meet diversified process requirements.
5. One person can operate 1-2 sets of equipment, the edge painting time for a single piece is 6-10 seconds, and the production efficiency is significantly improved.
6. With multi-axis control system and servo motor drive, it runs stably and reliably with high edge painting quality, reducing the rework rate.
7. Suitable for edge painting of special-shaped and complex materials (zipper windows, ear accessories, chain tails, etc.) with a wide range of applications.
8. Double manipulators perform edge painting alternately, the equipment runs without shutdown, and a single unit can save 3-5 labors.
9. Equipped with infrared rotary oven and intelligent temperature control, with excellent drying effect and high efficiency, and automatic blanking to further reduce labor costs.

规格表 Specifications

型号	Model	JL-Y4040C
额定电压	Rated voltage	AC380V-50Hz
额定功率	Rated power	12.5KW
最小油边范围W*L	Minimum planting edge range	20*10mm
最大油边范围W*L	Maximum planting edge range	400*400mm
油边时间	planting edge time	6-15s
气源压力	Air pressure	0.5-0.6MPa
油边部分外形尺寸（外形尺寸）	Planting edge section dimensions	1850*1450*2000mm
料仓外形尺寸（外形尺寸）	Shape and size of material box	1870*850*2000mm
前段烤箱外形尺寸	Front section oven dimensions	2380*900*1850mm
后段烤箱外形尺寸	Back section oven dimensions	2320*900*2050mm

产品特点 Application Features

主要用途: 适用于手袋、鞋业、皮具、手机配件等相关行业材料的油边作业。

工作范围: 最小材料 50mm*60mm，最大材料 700mm*450mm；双件同时油边最大尺寸 320mm*450mm，四件同时油边最大尺寸 120mm*450mm

核心优点:

1. 搭载视觉技术，提升生产线自动化与柔性化水平，摄像头自动捕捉加工件的轮廓，减少绘图误差，操作简单易懂，大幅缩短换款打版时间；
2. 双料仓交替上料设计，一仓工作一仓备用，可提前摆放物料，实现设备连续自动加工，无停机等待；
3. 油边夹具可根据不同尺寸和形状的物料任意调节，工作范围内无需更换夹具，使用方便，操作简单；
4. 支持油轮、油带两种油边模式，适配不同材质/工艺的油边需求；
5. 多轴控制系统+伺服电机驱动，设备运行平稳可靠，油边质量高，减少重复油边次数；
6. 双机械手交替油边，节省油边等待时间，设备无停机连续运行，提高生产效率，单台可节省人工3-5人；
7. 红外线旋转烤箱自动烘干，搭载智能温控系统，烘干效果佳、效率高，工件自动下料，大幅减轻工人操作负担。

Main application: Suitable for edge painting of materials in handbag, footwear, leather goods, mobile phone accessories and other related industries.

Scope: Minimum size of workpiece: 50mm*60mm; Maximum size of workpiece: 700mm*450mm; Maximum size for two workpieces at the same time: 320mm*450mm; Maximum size for four workpieces at the same time: 120mm*450mm.

Main advantages:

1. The plate making is equipped with visual technology, which improves the automation and flexibility level of the production line. The camera automatically captures the contour of the workpiece, reduces drawing errors, is simple and easy to operate, and greatly shortens the style change and plate making time.
2. Adopts a double material bin alternate feeding design, one bin works and the other is for standby. Materials can be placed in advance to realize continuous automatic processing of the equipment without shutdown waiting.
3. The edge painting fixture can be adjusted arbitrarily according to materials of different sizes and shapes. No need to replace the fixture within the working range, which is convenient to use and simple to operate.
4. Supports two edge painting modes of oil wheel and oil belt, suitable for edge painting requirements of different materials and processes.
5. With multi-axis control system and servo motor drive, the equipment runs stably and reliably with high edge painting quality, reducing the number of repeated edge painting.
6. Double manipulators perform edge painting alternately, saving edge painting waiting time, the equipment runs continuously without shutdown, improving production efficiency, and a single unit can save 3-5 labors.
7. The infrared rotary oven realizes automatic drying, equipped with an intelligent temperature control system, with excellent drying effect and high efficiency. The workpieces are automatically blanked, which greatly reduces the operational burden on workers.

规格表 Specifications

型号	Model	JL-Y7045B
额定电压	Rated voltage	AC380V-50Hz
额定功率	Rated power	16KW
最小油边范围W*L	Minimum planting edge range	50*60mm
最大油边范围W*L	Maximum planting edge range	700*450mm
油边时间	planting edge time	10-18s
气源压力	Air pressure	0.5-0.6MPa
料仓尺寸	Storage bin size	1165*1436*1673mm
油边段尺寸	Oil edge section size	1977*1669*1978mm
前段烤箱尺寸	Front oven size	2152*1049*1644mm
后段烤箱尺寸	Rear oven size	2400*1336*1644mm
净重	Net weight	2500KG
毛重	Goods weight	2660KG



JL-Y13050B 双肩带自动油边机

JL-Y13050B Automatic Edge Painting Machine for Double Shoulder Straps



——专利产品 仿冒必究——

JL-Y15050 皮带自动油边机

JL-Y15050 Automatic Edge Painting Machine For Belts



——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 适用于手袋、皮带、皮具等相关行业材料的油边作业
工作范围: 最大单件材料 1300mm×100mm, 双件同时油边最大尺寸 1300mm×50mm
核心优点:
1.油边全程无需人工操作, 仅手动堆料, 大幅减轻工人操作负担;
2.双工位旋转式上料机构, 最高叠料高度 145mm, 机器臂自动抓取定位, 可同时摆放 2 件材料油边, 提升上料效率;
3.支持油轮、油带两种油边模式, 适配不同材质 / 工艺油边需求;
4.三段式烘箱设计 (前/中/后), 工件自动输送、逐层烘干, 尾部自动落料收集, 烘干均匀无人工干预;
5.生产效率提升, 单人可操作 1-2 台设备, 双件油边耗时仅 6-12s;
6.多轴控制系统+伺服电机驱动, 设备运行平稳, 油边精度高, 减少重复油边次数;
7.双机械手交替油边, 设备无停机连续作业, 单台可节省人工 3-5 人。

Main application: Suitable for edge painting of materials in handbag, belt, leather goods and other related industries.
Working Range: Maximum size for single workpiece: 1300mm×100mm; Maximum size for two workpieces at the same time: 1300mm×50mm.
Main advantages:
1.The edge painting process requires no manual operation at all, only manual material stacking, which greatly reduces the operational burden on workers.
2.Equipped with a double-station rotary feeding mechanism with a maximum stacking height of 145mm. The robotic arm automatically grabs and positions materials, and can place 2 pieces of materials for edge painting at the same time to improve feeding efficiency.
3.Supports two edge painting modes of oil wheel and oil belt, suitable for edge painting requirements of different materials and processes.
4.Adopts a three-stage oven design (front, middle and back). Workpieces are automatically conveyed and dried layer by layer, with automatic blanking and collection at the tail, ensuring uniform drying without manual intervention.
5.Improves production efficiency, one person can operate 1-2 sets of equipment, and the edge painting time for two pieces is only 6-12 seconds.
6.With multi-axis control system and servo motor drive, the equipment runs stably with high edge painting precision, reducing the number of repeated edge painting.
7.Double manipulators perform edge painting alternately, the equipment runs continuously without shutdown, and a single unit can save 3-5 labors.

规格表 Specifications

型号	Model	JL-Y4040C
额定电压	Rated voltage	AC380V-50Hz
额定功率	Rated power	12.5KW
最小油边范围W*L	Minimum planting edge range	20*10mm
最大油边范围W*L	Maximum planting edge range	400*400mm
油边时间	planting edge time	6-15s
气源压力	Air pressure	0.5-0.6MPa
油边部分外形尺寸 (外形尺寸)	Planting edge section dimensions	1850*1450*2000mm
料仓外形尺寸 (外形尺寸)	Shape and size of material box	1870*850*2000mm
前段烤箱外形尺寸	Front section oven dimensions	2380*900*1850mm
后段烤箱外形尺寸	Back section oven dimensions	2320*900*2050mm

产品特点 Application Features

主要用途: 适用于手袋、皮带、皮具等相关行业材料的油边作业
工作范围: 单件最大油边尺寸 1500mm×100mm; 双件同时油边最大尺寸 1500mm×50mm
核心优点:
1.油边过程无需人工操作, 仅手动堆料, 大幅减轻工人操作负担;
2.配备双工位旋转式上料机构, 最高叠料高度 145mm, 手动堆放材料后机器臂自动抓取, 可同时摆放两件材料定位油边, 提升生产效率;
3.作业效率提升, 单人可操作 1 台设备, 双件材料油边时间约 6-12s;
4.运行平稳且油边质量高, 采用多轴控制系统, 伺服电机作为动力, 设备运行平稳可靠, 提升油边质量, 减少重复油边次数;
5.双机械手交替油边, 节省油边等待时间, 设备无停机连续运行, 进一步提高生产效率, 单台可节省人工 3-5 人。

Main application: Suitable for edge painting of materials in handbag, belt, leather goods and other related industries
Scope: Maximum size for single workpiece: 1500mm×100mm; Maximum size for two workpieces at the same time: 1500mm×50mm
Main advantages:
1.No manual operation is required during the edge painting process, only manual material stacking, which greatly reduces the operational burden on workers;
2.Equipped with a double-station rotary feeding mechanism with a maximum stacking height of 145mm. The robotic arm automatically grabs materials after manual stacking, and can place two workpieces at the same time for positioning and edge painting, improving production efficiency;
3.Improved operation efficiency, one person can operate 1 set of equipment, and the edge painting time for two workpieces is about 6-12s;
4.Stable operation and high-quality edge painting, adopting a multi-axis control system with servo motor as the power, the equipment runs stably and reliably, improving edge painting quality and reducing the number of repeated edge painting;
5.Double manipulators perform edge painting alternately, saving edge painting waiting time, the equipment runs continuously without shutdown, further improving production efficiency, and a single unit can save 3-5 labors.


规格表 Specifications

型号	Model	JL-Y15050
额定电压	Rated voltage	AC380V-50Hz
额定功率	Rated power	18KW
单件最大油边范围W*L	Maximum planting edge range	1500*100mm
油边时间	planting edge time	6-12s (两件)
气源压力	Air pressure	0.5-0.6MPa
油边部分外形尺寸 (外形尺寸)	Planting edge section dimensions	8121*2185*1995mm



JL-Y19045 四头自动油边机


JL-Y19045 Four-head Automatic Edge Painting Machine

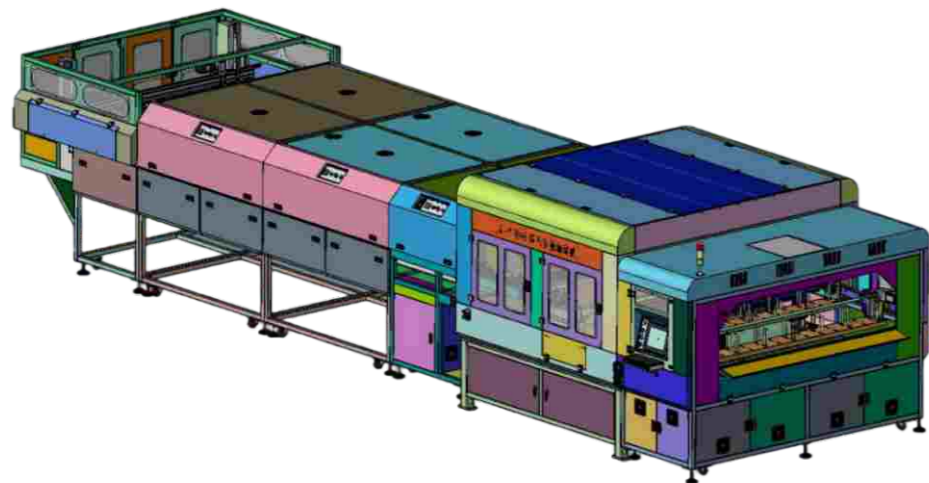

——专利产品 仿冒必究——

JL-YC1550 腰带自动油边机

JL-YC1550 Automatic Edge Painting Machine for Belts

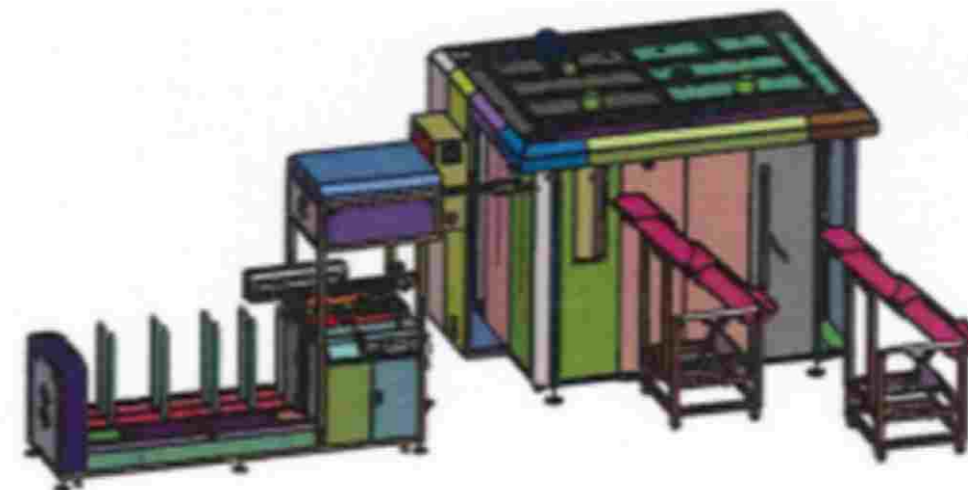

——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 适用于手袋、皮带、皮具等相关行业材料的油边作业
工作范围: 前后壁组合并排油边: 四件 1900mm×45mm; 前后壁单独分开循环取料油边: 四件 940mm×45mm; 单件最大油边范围 1900mm×45mm
核心优点:
1. 油边过程无需人工操作, 仅手动堆料, 大幅减轻工人操作负担;
2. 配备双工位旋转式上料机构, 最高叠料高度 145mm, 手动堆放材料后机器臂自动抓取, 可同时摆放四件材料定位油边, 有效提升生产效率;
3. 采用油轮单一油边模式, 适配对应工艺生产需求;
4. 搭载双层烘箱设计, 油边完成的工件由输送机构运送并均匀摆放在第一层烘箱输送带, 摆放位置与数量均可调节, 烘箱自动输送烘干, 工件运至第一层烘箱尾部时滑落到第二层烘箱输送带, 二次烘干后由第二层烘箱尾部自动落料收集, 烘干全程自动化;
5. 作业效率提升, 单人可操作 1 台设备, 四件物料油边时间约 20-25s;
6. 运行平稳且油边质量高, 采用多轴控制系统, 伺服电机作为动力, 设备运行平稳可靠, 提升油边质量, 减少重复油边次数;
7. 前后臂可灵活切换作业模式, 前臂和后臂分别适配 950mm×45mm 尺寸物料, 物料长度小于 950mm×45mm 时, 前后臂可分别独立动作提升工作效率; 物料长度大于 950mm×45mm 时, 前后臂并排同步运行完成长料油边工艺;
8. 四件物料油边耗时 20~25 秒, 取料臂空移用时 5 秒, 总耗时 25~30 秒, 折算单件油边用时 6.25~7.5 秒 (物料规格变化会影响油边效率)。

Main application: Suitable for edge painting of materials in handbag, belt, leather goods and other related industries
Working Range: Front and rear arm combined side-by-side edge painting: 4 workpieces of 1900mm×45mm; Front and rear arm separate circular feeding edge painting: 4 workpieces of 940mm×45mm; Maximum edge painting range for single workpiece: 1900mm×45mm
Main advantages:
1.No manual operation is required during the edge painting process, only manual material stacking, which greatly reduces the operational burden on workers;
2.Equipped with a double-station rotary feeding mechanism with a maximum stacking height of 145mm. The robotic arm automatically grabs materials after manual stacking, and can place four workpieces at the same time for positioning and edge painting, effectively improving production efficiency;
3.Adopts a single oil wheel edge painting mode, suitable for the production requirements of corresponding processes;
4.Equipped with a double-layer oven design, the workpieces after edge painting are transported by the conveying mechanism and evenly placed on the conveyor belt of the first-layer oven, the placement position and quantity are adjustable, the oven automatically conveys and dries, the workpieces slide to the conveyor belt of the second-layer oven when transported to the tail of the first-layer oven, and are automatically blanked and collected at the tail of the second-layer oven after secondary drying, the whole drying process is automatic;
5.Improved operation efficiency, one person can operate 1 set of equipment, and the edge painting time for four workpieces is about 20-25s;
6.Stable operation and high-quality edge painting, adopting a multi-axis control system with servo motor as the power, the equipment runs stably and reliably, improving edge painting quality and reducing the number of repeated edge painting;
7.The front and rear arms can flexibly switch the operation mode, the front arm and the rear arm are respectively adapted to workpieces of 950mm×45mm. When the material length is less than 950mm×45mm, the front and rear arms can act independently to improve work efficiency; when the material length is greater than 950mm×45mm, the front and rear arms run side by side and synchronously to complete the edge painting process of long materials;
8.The edge painting time for four workpieces is 20~25 seconds, the idle moving time of the feeding arm is 5 seconds, the total time is 25~30 seconds, and the converted edge painting time for a single workpiece is 6.25~7.5 seconds (changes in material specifications will affect the edge painting efficiency).

规格表 Specifications

型号	Model	JL-Y19045
额定电压	Rated voltage	AC380V-50Hz
额定功率	Rated power	16KW
单件最大油边范围W*L	Maximum planting edge range	1900*45mm
油边时间	planting edge time	20-25s (四件)
气源压力	Air pressure	0.5-0.6MPa
油边部分外形尺寸 (外形尺寸)	Planting edge section dimensions	2897*2400*1984mm
料仓外形尺寸 (外形尺寸)	Shape and size of material box	2635*740*1984mm
前段烤箱外形尺寸	Front section oven dimensions	2000*2100*1621mm
中段烤箱外形尺寸	Queen section oven dimensions	2000*2100*1621mm
后段烤箱外形尺寸	Back section oven dimensions	2535*2405*1621mm

产品特点 Application Features

主要用途: 专用于手袋肩带、皮带等条状物料的油边作业
工作范围: 最小材料 13mm×1500mm, 最大材料 50mm×1500mm
核心优点:
1. 双料仓交替上料设计, 一仓工作一仓备用, 可提前摆放物料, 实现设备连续自动加工, 无停机等待;
2. 全程自动化作业, 自动送料、自动油边, 油边后工件自动挂入悬挂式烤箱, 大幅节省烤箱占地空间;
3. 油边宽度可根据不同尺寸的条状物料任意调节, 工作范围内无需更换夹具, 操作便捷;
4. 支持多模块化组合与单独拆分使用, 可组合为整体流水线作业提升生产效率, 也可单独使用适配小批量生产, 灵活性高;
5. 多元化控制系统 + 伺服电机驱动, 设备运行平稳可靠, 油边质量高, 减少重复油边次数。

Main application: Specially used for edge painting of strip materials such as handbag shoulder straps and belts
Scope: Minimum size of strip material: 13mm×1500mm; Maximum size of strip material: 50mm×1500mm
Main advantages:
1.Adopts a double material bin alternate feeding design, one bin works and the other is for standby. Materials can be placed in advance to realize continuous automatic processing of the equipment without shutdown waiting.
2.Realizes full automatic operation, including automatic feeding and automatic edge painting. After edge painting, the workpieces are automatically hung into the suspended oven, which greatly saves the floor space of the oven.
3.The edge painting width can be adjusted arbitrarily according to strip materials of different sizes. No need to replace the fixture within the working range, with convenient operation.
4.Supports multi-module combination and separate use. It can be combined into an integral assembly line to improve production efficiency, or used alone for small batch production with high flexibility.
5.With multi-variety control system and servo motor drive, the equipment runs stably and reliably with high edge painting quality, reducing the number of repeated edge painting.



JL-Y2520S 视觉数控油边机(循环型)

JL-Y2520S Visual CNC Edge Painting Machine (Circulation Type)



——专利产品 仿冒必究——

JL-SP10080D 视觉喷胶机（精准涂胶/满喷）

JL-SP10080D Visual Glue Spraying Machine(Precision Edge Spraying/Full Spraying)



——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 适用于手袋、鞋业、皮具等相关行业材料的油边
工作范围: 最小材料 10mm×20mm, 最大材料 250mm×200mm

- 核心优点:**
- 1.油边过程无需人工操作, 减轻工人操作负担;
 - 2.两台数控油边机并接为一台循环式油边, 一件材料可油两次油边, 节省人工反复上料环节。
 - 3.提高工作效率, 一人可操作 2-3 台设备, 油边时间约为 8-10s, 拉链窗口内外油边时间 10s-15s;
 - 4.运行平稳, 油边质量高, 采用多轴控制系统, 伺服电机作为动力, 使设备运行平稳可靠, 油边的质量更高, 减少油边的次数;
 - 5.适用范围广, 可适配拉链窗口内外、耳仔配件、链尾等各类异形复杂材料的油边作业;
 - 6.双机械手交替油边, 节省油边等待时间, 设备不停歇连续运行, 提高生产效率, 单台可节省人工 3-5 人;
 - 7.红外线旋转烤箱自动烘干, 采用智能温控技术, 烘干效果佳、效率高, 工件自动下料, 进一步减轻工人操作负担。

Main application: Suitable for edge painting of materials in handbag, footwear, leather goods and other related industries
Scope: Minimum size of workpiece: 10mm×20mm; Maximum size of workpiece: 250mm×200mm

- Main advantages:**
- 1.No manual operation is required during the edge painting process, reducing the operational burden on workers;
 - 2.Two CNC edge painting machines are connected into one circulation type edge painting machine, one piece of material can complete two edge painting processes synchronously, saving the link of manual repeated feeding;
 - 3.Improve work efficiency, one person can operate 2-3 sets of equipment, the edge painting time is about 8-10s, and the edge painting time inside and outside the zipper window is 10-15s;
 - 4.Stable operation and high-quality edge painting, adopting a multi-axis control system with servo motor as the power, making the equipment run stably and reliably, improving the quality of edge painting and reducing the number of repeated edge painting;
 - 5.Wide application range, suitable for edge painting of various special-shaped and complex materials such as the inside and outside of zipper windows, ear accessories, chain tails, etc.;
 - 6.Double manipulators perform edge painting alternately, saving edge painting waiting time, the equipment runs continuously without interruption, improving production efficiency, and a single unit can save 3-5 labors;
 - 7.The infrared rotary oven realizes automatic drying with intelligent temperature control technology, featuring excellent drying effect and high efficiency. The workpieces are automatically blanked, further reducing the operational burden on workers.

规格表 Specifications

型号	Model	JL-Y2520S
额定电压	Rated voltage	AC380V-50Hz
额定功率	Rated power	18.5KW
最小油边范围W*L	Minimum colouring edge range	20*10mm
最大油边范围W*L	Maximum colouring edge range	250*200mm
油边时间	Colouring edge time	5-15s
气源压力	Air pressure	0.5-0.6MPa
外观尺寸	Appearance size	7040*2200*1960mm
烤箱外形尺寸	Front section oven dimensions	5400*623*1450mm

产品特点 Application Features

主要用途: 适用于鞋类、手袋、钱包、箱包、礼品盒等行业材料的喷胶作业
工作范围: 有效识别范围: 1000mm X 800mm。

适用胶水: 白胶、水性胶、亚么尼亚胶、可喷油性胶。

主要优点:

- 1.高效省人工, 涂胶速度快, 单台可节省人工 3-5 人, 有效提高生产效率, 降低人工成本;
- 2.精准省胶水, 搭载稳定数控涂胶系统与可调试喷胶头, 可沿物料边缘喷 3-15mm 宽度胶水, 适配不同喷胶宽度需求;
- 3.喷胶均匀且薄, 可节省胶水 20% 左右, 大幅降低物料成本, 作业效益高;
- 4.操作便捷, 物料自动输送, 搭载基于 CCD 相机的视觉自动定位系统, 自动捕捉加工件、生成喷胶路线, 减少绘图误差, 操作简单易懂;
- 5.智能化程度高, 视觉传感器提升设备自动化与柔性化水平, 有效提高生产线效率与产品质量;
- 6.适应性广, 有效喷胶范围内可识别不同颜色、形状、位置的材料, 适配不同物料特性的生产需求;
- 7.环保节能, 配备抽风系统, 可吸风处理喷胶时产生的胶水气味, 优化作业环境。

The main purpose: Suitable for glue spraying of materials in footwear, handbag, wallet, luggage, gift box and other related industries.

The scope of work: Effective recognition range: 1000mmX800mm.

Apply glue: White glue, water-based glue, ammonia glue, sprayable oil-based glue

The main advantage:

- 1.High efficiency and labor saving, with fast glue coating speed, a single unit can save 3-5 labors, effectively improving production efficiency and reducing labor costs.
- 2.Precise and glue saving, equipped with a stable numerical control glue coating system and adjustable glue spray head, it can spray glue with a width of 3-15mm along the edge of materials, adapting to different glue spraying width requirements.
- 3.The glue spraying is even and thin, which can save about 20% of glue, greatly reduce material costs and achieve high operation efficiency.
- 4.Easy to operate, materials are automatically conveyed, equipped with a visual automatic positioning system based on CCD camera, which automatically captures workpieces and generates glue spraying routes, reducing drawing errors and being simple and easy to understand.
- 5.High intelligence, the visual sensor improves the automation and flexibility of the equipment, effectively improving the efficiency of the production line and product quality.
- 6.Wide adaptability, it can identify materials of different colors, shapes and positions within the effective glue spraying range, adapting to the production needs of different material characteristics.
- 7.Environmental protection and energy saving, equipped with an air extraction system, which can absorb and treat the glue odor generated during glue spraying and optimize the working environment.

规格表 Specifications

型号	Model	JL-SP10080D
额定电压	Rated voltage	AC220V-50Hz
额定功率	Rated power	3.5KW
有效识别范围	Effective range of identification	1000*600mm
气源压力	Air pressure	0.5-0.6MPa
外形尺寸	section dimensions	6203*1790*2013mm
净重	Net weight	850KG
毛重	Goods weight	1050KG



JL-SP6045B 视觉喷胶机(精准喷胶和涂胶)

JL-SP6045B Visual Glue Spraying Machine(Precision Edge Spraying And Gluing)



——专利产品 仿冒必究——

JL-SP9065 视觉喷胶机（精准喷涂）

JL-SP9065 Visual Glue Spraying Machine(Precision Edge Spraying)



——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 适用于鞋类、手袋、钱包、箱包、礼品盒等行业材料的涂胶作业。
工作范围: 有效识别范围: 600mm×450mm。
适用胶水: 白胶、水性胶、亚么尼亚胶、油性胶。

核心优点:

- 1.提升效率节省人工，涂胶速度快，单台可节省人工 3-5 人，有效提高生产效率，降低人工成本；
- 2.精准省胶降低物料成本，搭载运行稳定的数控涂胶系统，可更换不同宽度涂胶头，适配不同涂胶宽度需求，可沿物料边缘涂 3-10mm 宽度胶水（不同宽度需更换对应胶嘴）；
- 3.涂胶效率高，出胶均匀且薄，可节省胶水 20% 左右，作业效益更高；
- 4.操作便捷且智能化，物料自动输送，配备视觉自动定位系统；该系统基于 CCD 相机搭建，加装视觉传感器实现类人视觉功能，提升设备智能化水平，进而提高生产线效率与产品质量；利用机器视觉技术提升生产线自动化与柔性化水平，摄像头自动捕捉加工件并自动生成涂胶路线，减少绘图误差，操作简单易懂；
- 5.适应性广，在有效涂胶范围内，可识别不同颜色、不同形状、不同位置的材料，更好适配生产中多样化的物料特性需求；
- 6.环保节能，设备配备抽风系统，可吸风处理涂胶时产生的胶水气味（过滤芯每三个月需更换一次）。

AIN APPLICATION: Suitable for glue coating of materials in footwear, handbag, wallet, luggage, gift box and other related industries.

THE SCOPE OF WORK: Effective recognition range: 600mm×450mm.

APPLY GLUE: White glue, water-based glue, ammonia glue, oil-based glue

THE MAIN ADVANTAGE:

- 1.Improve efficiency and save labor costs, with fast glue coating speed,one set can save 3-5 labors, effectively improving production efficiency and reducing labor costs;
 - 2.Precisely save glue and reduce material costs, equipped with a stable numerical control glue coating system, the glue coating heads of different widths can be replaced to better meet users' requirements for different glue coating widths, and glue with a width of 3-10mm can be coated along the edge of materials (replace different nozzles for different widths);
 - 3.High glue coating efficiency, uniform and thin glue application, which can save about 20% of glue and achieve higher operation efficiency;
 - 4.Easy to operate and intelligent, materials are automatically conveyed and equipped with a visual automatic positioning system; the system is built based on CCD camera, and visual sensors are added to realize human-like visual functions, improve the intelligence level of the equipment, and thus improve the efficiency of the production line and product quality; machine vision technology is used to improve the automation and flexibility of the production line, the camera automatically captures workpieces and generates glue coating routes automatically, reducing drawing errors and making operation simple and understandable;
 - 5.Wide adaptability, within the effective glue coating range, it can identify materials of different colors, shapes and positions, better adapting to the needs of diverse material characteristics in production;
- Environmental protection and energy saving, the equipment is equipped with an air extraction system, which can absorb and treat the glue odor generated during glue coating (the filter element needs to be replaced every three months).

规格表 Specifications

产品特点 Application Features

主要用途: 适用于鞋类、手袋、钱包、箱包、礼品盒等行业材料的喷胶。
工作范围: 有效识别范围: 900mm X 650mm。
适用胶水: 白胶、水性胶、亚么尼亚胶、可喷油性胶。

主要优点:

- 1.提高效率，节省人工成本；涂胶速度快，可节省5-8人，有效提高生产效率，降低人工成本。
- 2.节省胶水，降低成本；运行稳定的数控涂胶系统，可调试的喷胶头，更好的适用用户不同喷胶宽度的要求，可沿物料沿喷5-15mm宽度的胶水。
- 3.操作效率高，喷胶均匀且薄，可节省胶水20%左右，效益高。
- 4.操作方便，物料自动输送，视觉自动定位。视觉系统是一套基于视觉信息，来完成一定功能的设备。加装视觉传感器的目的是使设备具备类似人类的视觉功能，从而提高设备的智能化程度，从而提高生产线的效率和提升产品质量。利用机器视觉完成一些不适合人类的危险环境的工作或人眼难以满足质量要求的场合，因此可利用机器视觉技术，能提高生产线的自动化和柔性化水平，使用摄像头自动捕捉加工件的轮廓，从而减少绘图的误差，简单易懂。
- 5.适应性广。在有效的喷胶范围内，可以识别不同颜色、不同形状，不同位置的材料，更好的适应制作过程中，需要不同材料的特性。
- 6.环保节能，设备具有抽风系统，可将喷胶时产生的胶水气味进行吸风处理。

THE MAIN PURPOSE: Suitable for glue spraying of materials in industries such as footwear, handbags, wallets, luggage and gift boxes.

THE SCOPE OF WORK: Effective identification range: 900mm×650mm.

APPLY GLUE: White glue, water-based glue, ammonia glue, sprayable oil-based glue.

THE MAIN ADVANTAGE:

- 1.Improve efficiency and save labor costs; Fast glue application speed, which can save 3-5 labors, effectively improve production efficiency and reduce labor costs.
- 2.Save glue and reduce costs; The numerically controlled glue application system with stable operation and adjustable glue application head can better meet users' requirements for different glue spraying widths, and can spray glue with a width of 3-10mm along the edge of materials.
- 3.High operation efficiency, uniform and thin glue spraying, which can save about 20% of glue with high benefits.
- 4.Easy to operate, with material pallet placement and automatic visual identification and positioning. The vision system is a set of equipment that completes certain functions based on CCD camera. The purpose of installing the vision sensor is to make the equipment have human-like visual functions, thereby improving the intelligence of the equipment, the efficiency of the production line and the product quality. The use of machine vision technology can improve the automation and flexibility of the production line, and the camera is used to automatically capture the contour of the workpiece, thus reducing drawing errors, which is simple and easy to understand.
- 5.Wide adaptability. Within the effective glue application range, it can identify materials of different colors, shapes and positions, and better adapt to the characteristics of different materials required in the production process.
- 6.Environmental protection and energy saving. The equipment is equipped with an exhaust system, which can absorb the glue odor generated during glue spraying (the filter element needs to be replaced every three months).

规格表 Specifications

型号	Model	JL-SP9065
额定电压	Rated voltage	AC220V-50Hz
额定功率	Rated power	3.5KW
有效识别范围	Effective range of identification	900*650mm
托盘数量	Number of pallets	10 pcs
气源压力	Air pressure	0.5-0.6MPa



JL-SP10050 输送带喷胶机（满喷）

JL-SP10050 Conveyor Belt Glue Spraying Machine(Full Surface Spraying Only)



——专利产品 仿冒必究——

JL-SP16050 输送带喷胶机（满喷款）

JL-SP8060 Conveyor Belt Glue Spraying Machine(Full Surface Spraying Only)



——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 适用于鞋类、手袋、钱包、箱包、礼品盒等行业材料的喷胶作业。
工作范围: 有效工作范围 1600mm×500mm。
适用胶水: 白胶、水性胶、亚么尼亚胶、可喷油性胶。

主要优点:

- 1.提高效率，节省人工成本；喷胶运行稳定，速度快，可节省人工 2-4 人，有效提高生产效率，降低人工成本。
- 2.运行稳定的数控喷胶系统，喷枪高度、胶量大小可调节，更好的适应不同喷胶厚度的要求。
- 3.节省胶水，降低成本；操作效率高，喷胶均匀且薄，可节省胶水 20% 左右，效益高。
- 4.设定输送带每次运行步距后，无需重复设定，即可自动运行，操作员只需放料，操作方便，降低劳动强度。
- 5.环保节能，设备具有抽风系统，可将喷胶时产生的胶水气味进行吸风处理。
- 6.设备增加烤箱烘干，使胶水更具有粘性，达到更好的粘贴效果。

THE MAIN PURPOSE: Suitable for glue spraying of materials in footwear, handbag, wallet, luggage, gift box and other related industries.

THE SCOPE OF WORK: Effective working range: 1600mm×500mm.

APPLY GLUE: White glue, water-based glue, ammonia glue, sprayable oil-based glue.

THE MAIN ADVANTAGE:

- 1.Improve efficiency and save labor costs; the glue spraying runs stably and fast, saving 2-4 labors, effectively improving production efficiency and reducing labor costs.
- 2.Equipped with a stable numerical control glue spraying system, the height of the spray gun and the amount of glue can be adjusted to better meet the requirements of different glue spraying thicknesses.
- 3.Save glue and reduce costs; high operation efficiency, uniform and thin glue spraying, saving about 20% of glue with high benefits.
- 4.After setting the running step of the conveyor belt each time, it can run automatically without repeated setting, the operator only needs to feed materials, which is easy to operate and reduces labor intensity.
- 5.Environmental protection and energy saving, the equipment is equipped with an air extraction system to absorb and treat the glue odor generated during glue spraying.
- 6.The equipment is added with an oven for drying, which makes the glue more viscous and achieves a better pasting effect.

规格表 Specifications

型号	Model	JL-P16050
额定电压	Rated voltage	AC380V-50Hz
额定功率	Rated power	6.5KW
有效识别范围	Effective range of identification	1600*500mm
气源压力	Air pressure	0.5-0.6MPa
外形尺寸L*W*H	section dimensions L*W*H	2700*2430*1900mm
净重	Net weight	550KG
毛重	Goods weight	700KG

产品特点 Application Features

主要用途: 适用于鞋类、手袋、钱包、箱包、礼品盒等行业材料的喷胶。
工作范围: 有效识别范围: 1000mm×500mm。
适用胶水: 白胶、水性胶、亚么尼亚胶、油性胶。

核心优点:

- 1.提高效率，节省人工成本；喷胶运行稳定，速度快，可节省人工 2-4 人，有效提高生产效率，降低人工成本。
- 2.运行稳定的数控喷胶系统，喷枪高度、胶量大小可调节，更好的适应不同喷胶厚度的要求。
- 3.节省胶水，降低成本；操作效率高，喷胶均匀且薄，可节省胶水 20% 左右，效益高。
- 4.操作方便，降低劳动强度。设定输送带每次运行步距后，无需重复设定，即可自动运行，操作员只需放料，设备即可运行。
- 5.环保节能，设备具有抽风系统，可将喷胶时产生的胶水气味进行吸风处理。
- 6.设备增加烤箱烘干，使胶水更具粘性，达到更好的粘贴效果。

MAIN APPLICATION: Suitable for glue spraying of materials in footwear, handbag, wallet, luggage, gift box and other related industries.

SUITABLE GLUE: White glue, water-based glue, ammonia glue, oil-based glue.

WORKING AREA: Effective recognition area: 1000mm×500mm.

PRODUCT FEATURE:

- 1.Improve efficiency and save labor cost. The machine runs stably with fast spraying speed, saving 2-4 workers, effectively improving production efficiency and reducing labor cost.
- 2.Stable CNC glue spraying system with adjustable spray gun height and glue volume, better adapting to different glue thickness requirements.
- 3.Save glue and reduce cost. High operation efficiency, uniform and thin glue spraying, saving about 20% glue with high benefit.
- 4.Easy to operate and reduce labor intensity. After setting the conveyor step distance, the machine runs automatically without repeated setting. Operators only need to place materials.
- 5.Environmentally friendly and energy-saving. Equipped with an air extraction system to treat the odor generated during glue spraying.
- 6.Equipped with an additional oven for drying, making glue more adhesive and achieving better bonding effect.


规格表 Specifications

型号	Model	JL-SP10050
额定电压	Rated voltage	AC220V-50Hz
额定功率	Rated power	3.5KW
有效识别范围	Effective range of identification	1000*500mm
气源压力	Air pressure	0.5-0.6MPa
外形尺寸L*W*H	section dimensions L*W*H	3900*1500*1730mm
净重	Net weight	580KG
毛重	Goods weight	700KG



JL-P8050 数控喷胶机（满喷）

JL-P8050 CNC Glue Spraying Machine (Full Surface Spraying Only)

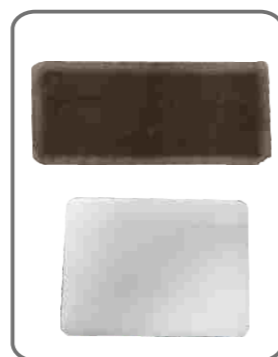

——专利产品 仿冒必究——

JL-D003B 自动高周波电压机

JL-D003B Automatic High Frequency Welding Machine



——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 适用于手袋、银包、箱包、鞋类、礼品盒等行业材料的喷胶。
工作范围: 有效工作面积 800mm×500mm。
适用胶水: 白胶、水性胶、亚么尼亚胶。

主要优点:

- 1.提高效率,节省人手;喷胶运行平稳,速度快,可节省人工 2-4 人,有效提高生产效率,降低人工成本。
- 2.节省胶水,降低成本;运行稳定的数控喷胶系统,采用进口气动喷枪,喷枪高度及喷射宽度可调节,喷胶均匀且薄,胶水易干,胶水宽度 3-50mm,比传统喷胶节省胶水 40%-60%,降低生产成本。
- 3.操作简单方便;配有手动、脚踏和自动控制系统,用户可直接在触摸屏上进行任意图形设定,操作方便快捷,可手动输入或示教输入。系统可储存图形多达 999 个(规则或不规则)。
- 4.物料放置方便快捷;附感应装置自动上升料台,可自行感应物料高度并自动上升到适应高度后进行喷胶,喷胶距离控制更精确。可一次性放置多件物料,减少放料时间,提高生产效率。
- 5.环保节能:设备具备抽风系统,可将喷胶时产生的胶水气味和雾气进行过滤处理,设备待机时,喷胶装置全封闭,防止胶水挥发或堵塞喷头。

MAIN APPLICATION: Suitable for glue spraying of materials in handbag, wallet, luggage, footwear, gift box and other related industries.

SUITABLE GLUE: Effective working area 800mm×500mm

APPLICABLE GLUES: White glue, water-based glue, chloroprene adhesive.

PRODUCT FEATURE:

- 1.Improve efficiency and save labor; the machine runs stably and fast, saving 2-4 workers, effectively improving production efficiency and reducing labor costs.
- 2.Save glue and reduce costs; stable CNC glue spraying system with imported pneumatic spray gun, adjustable spray height and width, uniform and thin glue layer, fast drying. Glue width 3-50mm, saves 40%-60% glue compared with traditional spraying, reducing production costs.
- 3.Easy and convenient to operate; equipped with manual, foot pedal and automatic control system. Users can set any patterns on the touch screen, operation is convenient (manual input or teaching input). The system can store up to 999 patterns (regular or irregular).
- 4.Convenient and fast material placement; with automatic lifting table by induction device, it automatically senses material height and rises to proper position for spraying, ensuring more accurate spraying distance. Multiple materials can be placed at one time, reducing loading time and improving efficiency.
- 5.Environmentally friendly and energy-saving; the machine is equipped with an air extraction system to filter glue odor and mist. During standby, the spraying unit is fully closed to prevent glue volatilization and nozzle clogging;

规格表 Specifications

型号	Model	JL-P8050数控喷胶机	JL-P8050
工作电压	Voltage	AC220V	220V
额定功率	Power	0.75kw	0.75kw
外形尺寸	Dimensions	1090x1410x1510mm	1090mm*1410mm*1510mm
喷胶范围	Working area	800x 500mm	800mm*500mm
X轴驱动电机	The X axis drive motor	57JSFM1430P系列伺服电机	57 JSFM1430P Series servo motor
Y轴驱动电机	The Y axis drive motor	57JSFM1430P系列伺服电机	57 JSFM1430P Series servo motor
抽风方式	Take out wind way	风筒式轴流抽风机	Wind tube axial flow fan
下枪方式	Spray gun down way	气缸下枪	Cylinder add pressure
最大速度	Maximum speed	50mm/S	50mm/S

产品特点 Application Features

主要用途: 适用于手袋、皮带、牛仔裤等皮具制品的商标喷头的压印制作。
工作范围: 可根据实际要求进行制作

主要特点:

- 1.采用 PLC 与高周波结合控制定位,定位精确,压印质量好。
- 2.自动送料,连续工作,一人多机,效率高,较传统机型提高 4~6 倍。
- 3.精确控温,自动启动调整,高周波压印质量好。
- 4.操作简单,安全可靠,遇进料异常、出料异常、高周波异常等异常情况可自动报警。

MAIN APPLICATION: Suitable for trademark and logo embossing of leather products such as handbags, belts, jeans, etc;
WORKING AREA: Can be customized according to actual requirements.

PRODUCT FEATURE:

- 1.Adopt PLC and high frequency combined control for precise positioning, with good embossing quality.
- 2.Automatic feeding, continuous working, one operator can manage multiple machines, high efficiency, 4~6 times higher than traditional machines.
- 3.Precise temperature control, automatic start and adjustment, ensuring high-quality high frequency embossing.
- 4.Simple operation, safe and reliable. It can alarm automatically in case of abnormal feeding, discharging or high frequency.

规格表 Specifications

型号	Model	JL-D003B
工作电压	Voltage	380V
额定功率	Power	6.5kw
外形尺寸	Dimensions	1500mm*1100mm*1750mm



JL-PZ003 自动喷胶折链窗机


JL-PZ003 Automatic Gluing and Chain Folding Window Machine



——专利产品 仿冒必究——

JL-P2616 喷胶贴合一体机

JL-P2616 Spraying glue bonding Machine

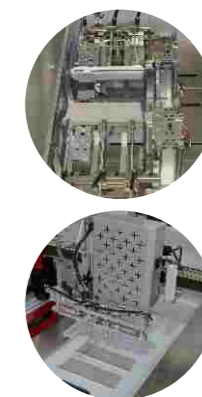

MAIN APPLICATION: Suitable for spray, adhesive, TPU adhesive
WORKING AREA: Effective working area 260mm*160mm
PRODUCT FEATURE:

——专利产品 仿冒必究——
专利: ZL 2017 2 0883547.X

产品特点 Application Features

主要用途: 适用于各种皮料的喷胶, 贴合, TPU胶的热压贴合
适用范围: 260mm×160mm
主要优点:

1. 工序整合: 将喷胶工序和贴合工序整合到一台设备上完成, 使产品的一致性得到保证, 不会由于人为因素导致产品千差万别。
2. 适应性强: 尺寸范围在260mm×160mm, 两件材料需要喷胶贴合工艺的都可以适用。也可以单独用于对材料表面的喷胶。水性胶、油性胶、白胶、亚玛利亚胶都适用于本台设备。针对目前皮具行业工艺上的改进, 将之前的表面喷胶改由TPU胶膜替代, 我们在设备上也附加了适用于TPU胶膜的功能(加热粘合)。
3. 程序控制, 操作方便, 采用专业的喷胶运动控制器控制, 喷胶路径和运动速度可随意编辑及保存。物料路径也可以在电脑上编辑好后通过示教器上USB接口导入保存。设备可以保存999个路径文件, 方便日后产品翻单生产。
4. 料位整料: 料仓有前后两个料位, 每个料位都有两个拍料的挡边, 把料仓里的物料通过这个机构整理好保证定位精度, 从而保证两张物料的相对位置准确, 以保证产品质量。
5. 维护简单: 输送带是本设备的耗材, 需要定期更换(也取决于适用频率), 输送带是由魔术贴连接, 更换时无需工具方便快捷。

MAIN APPLICATION: Suitable for spray, adhesive, TPU adhesive
WORKING AREA: Effective working area 260mm*160mm
PRODUCT FEATURE:

1. Process integration: glue spraying process and fitting process integrated into a single equipment to complete, so that the consistency of the product is guaranteed, will not be caused by man-made factors resulting in a wide range of differences in the product.
2. The adaptability is in the range of 260mm × 160mm, and both materials are suitable for spray bonding process. It can also be used separately to spray glue on the surface of the material. Water-borne glue, oily glue, white glue are all suitable for this equipment. In view of the technological improvement in the leather industry, the former surface spray was replaced by TPU film. We also added the function (heating bonding) which is suitable for TPU film on the equipment.
3. Program control, easy to operate: Control with professional spray motion controller, spray path and speed can be edited and saved at will. The material path can also be edited on the computer and saved through the USB interface on the instructor. The equipment can save 999 path files for future production.
4. Material level finishing There are two front and back material levels in the silo, and each material level has two bezels of the beat material. The material in the silo is arranged through this mechanism to ensure the positioning accuracy, so that the relative position of the two pieces of material can be guaranteed to be accurate. To ensure the quality of the product.
5. Simple maintenance: The belt is the consumable of the equipment, it needs to be replaced regularly (also depends on the applicable frequency), the convey.

规格表 Specifications

型号	Model	JL-P2616
额定电压	Rated voltage	AC220V
额定功率	Rated power	1.8KW
最大范围W*L	Maximum edge range	400*350mm
气源压力	Air pressure	0.5-0.6MPa
包装尺寸	Outsize	2350*1790*2180mm

产品特点 Application Features


主要用途: 用于拉链窗的喷胶及折边粘贴。
工作范围: 拉链窗尺寸 < 325mm
主要特点:

1. 集拉窗喷胶、折边、粘三道工序于一体, 提升效率, 减少人工。
2. 喷胶长度与胶水宽度均可自由调节, 适配多种规格, 节省胶水用量。
3. 可根据不同拉窗长度调整折边模具长度, 适配多种尺寸拉窗折边。
4. 触摸屏控制, 操作简便。

APPLICATION: Suitable for glue spraying and edge folding & pasting of zipper windows.
WORKING RANGE: Zipper window size < 325mm
MAIN ADVANTAGES:
1. Integrates glue spraying, edge folding and pasting processes for zipper windows, improving efficiency and reducing labor.
2. The length of glue spraying and width of glue can be freely adjusted to fit various specifications and save glue consumption.
3. The length of the folding mold can be adjusted according to different zipper window lengths, suitable for folding various sizes of zipper windows.
4. Touch screen control for easy operation.

规格表 Specifications

型号	Model	JL-PZ003
额定电压	Rated voltage	AC220V
额定功率	Rated power	0.5KW
折边长度范围	Fold length range	≤325mm
外形尺寸	Outline dimension	1400mm*1000mm*1400mm

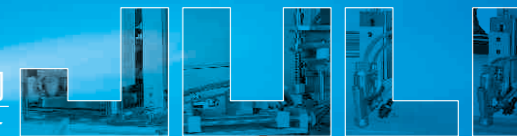

JL-B003 半自动包手挽机

JL-B003 Semi-automatic Handle Wrapping Machine



注：不同款的手挽须用不同的模具

产品特点 Application Features

主要用途: 适用于手袋手挽的压边成型
工作范围: 能适应不同规格的手挽

主要特点:

1. 成型效果好, 节省成型时间, 提高效率, 降低人工成本;
2. 操作简单、方便、安全;
3. 根据手袋手挽的不同尺寸, 可以更改压边模具的大小, 能适应不同规格的手挽。

MAIN APPLICATIONS: It is suitable for pressing and molding of handbags arm.

WORKING AREA: According to the size of handbag handle to set the model, can adapt to different specifications of the handbag handle.

PRODUCT FEATURE:

1. The high efficiency of handbags blank holder and molding, save the forming time, improve the production efficiency, reduce the labor cost;
2. It is easy to operate, convenient and safety.
3. According to the handbags size to change the edge pressing mold, can adapt to different specifications of handbags.
4. It make handbags arm forming more beautiful than labor form.

型号	Model	JL-B003
工作电压	Voltage	AC220V
外形尺寸	Dimensions	800mm*500mm*950mm

JL-RH8060 粘合机

JL-RH8060 adhesive machin



产品特点 Application Features

1. 品质好效率高: 连续粘接式作业, 生产效率高, 强力弹簧加压, 粘合后的皮料平整牢固不易起皱。
 2. 加热温度均匀: 专业器件智能控制温差至最小, 加热系统传热均匀。
1. High quality and high efficiency: continuous bonding operation, high production efficiency, high strength spring, and smooth and firm leather.
 2. The heating temperature is uniform: the temperature difference of the intelligent control of the professional device to the minimum, and the heat transfer of the heating system is uniform.

型号	Model	JL-RH8060
电压	Rated voltage	380V
功率	power	7kw
外形尺寸	Dimension	1730×1050×1160mm

JL-118 水性喷胶机

JL-118 Water-based Glue Spraying Machine



标准型喷枪

双液型喷枪

产品特点 Application Features

广泛用于鞋面内里, 套头, 皮箱, 皮包, 皮带及皮类各种不同制造业。
Suitable for making shoe lining, shoe toe puff, leather case, leather bag, golf bag, leather belt and other leather products.

适用于任何天然胶, 水性胶。

操作简单, 喷涂均匀, 可调整喷幅面积及胶量大小。

节省用胶, 电力及人力, 提高品质及质量, 降低成本。

Suitable for all nature adhesives and water-based adhesives.

Simple operation, equal coating, adjustable coating area and adhesive volume.

Saving use volume of adhesive, power and labor; improving quality, lowering cost.)

广泛用于鞋面、内里、套头、皮箱、皮包、皮带及皮类等各种不同制造业上。

1. 适用于: 任何天然胶、水性胶。

2. 操作简单, 喷涂均匀, 可调整喷幅面积及胶量大小。

3. 节省用胶、电力及人力, 提高品质及产量、降低成本。

1. It is suitable for: Any natural adhesive, water base adhesive area and adhesive volume.

2. Easy to operate, spraying even, adjustable adhesive area and adhesive volume.

3. To save adhesive, electricity consumption and labor cost, to enhance quality and productivity, to reduce production cost.

型式	Model	JL-230
电源	Source	220W
使用气压力	Used air pressure	5kg/cm ²
净重/毛重	N.W/G.W.	70/150kg
机器尺寸	Machine size	120×55×164cm

JL-105 油压平面压花机

JL-105 Oil pressure plane embossing machine



产品特点 Application Features

主要用途: 专业皮革压花

产品特点:

1. 本机具有自动送料系统, 可以自动送料提高生产效率;
2. 它可以设置压花时间和温度, 因此它能够适应多种不同物料需求;
3. 容易操作, 保证设备安全, 防止事故;

Main Application: It is suitable to embossing leather material

PRODUCT FEATURE:

1. It has automatic feeding material system, can convey material automatically, reduce produce process, and improve produce effect;
2. It can set the embossing time and temperature, so it can adapt many kinds of different material requirement;
3. It is easy to operate, and it has safety assurance device to prevent accident;

型号	Mode	JL-105
工作压力	Working pressure	120Ton
马达	Motor power	3kw
工作面积	Working area	600×500
体积	Dimension	1550×1150×1520mm
重量	Net weight	2000kg



JL-RP8050 热熔胶喷胶机

JL-RP8050 Hot melts adhesive spraying machine



——专利产品 仿冒必究——

JL-S9300 双层流水线成品烘干机（两端升降型）

JL-S9300 Double layer assembly line dryer (Finished Bag)



——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 适用于手袋、银包、箱包，鞋类、礼品盒等行业材料的喷胶。
工作范围: 有效工作面积为800mm*500mm
适用胶水: 热熔胶
主要优点:

- 1.提高效率、节省人工：喷胶运行平稳，速度快，可节省2~4人，有效提高生产效率，降低人工成本，降低人工成本，也可根据实际需要，安装双头喷枪。
- 2.数控系统自动控制，运行稳定，喷胶效果佳，可根据实际情况调整喷胶宽度。
- 3.操作简单、方便：手动、脚踏和自动控制系统。用户可直接在触摸屏上进行任意图形的设定、操作方便（手动输入或示教的方式输入均可）。系统可存储图形多达999个（规则或者不规则）。
- 4.节能环保：设备具备抽风系统，可将喷胶时产生的胶水气味和雾气进行过滤处理，设备待机时，喷胶装置全封闭。

MAIN APPLICATION: To glue large material together for industries including footwear, belts, handbags, suitcases gift wrap ping etc.

SUITABLE GLUE: Hot melt glue

WORKING AREA: Effective working area 800mm*500mm

PRODUCT FEATURE:

- 1.To improve efficiency, save labor costs, the spray glue speed fast, can save around 2-4 workers, effectively improve the production efficiency, reduce labor costs. It also can install the double spray gun to spray if is necessary.
- 2.Save the glue to reduce the cost: It has automatic glue control system, the machine running stable, and adopt the adjustable spray glue gun head, the spray width can be 3-50mm, spray uniform and thin, faster than the traditional brush glue, and it saves glue 40%~60%
- 3.Easy operation :the machine is designed with manually operation, foot pedal and automatic control system, besides, the spray glue graph can be set on the touch screen, you can set the graph on the touch screen manual or use USB to transport the graph, and stored graphics up to 999(regular or irregular)
- 4.Environmental protection and energy conservation; this machine has wind exhausting system, can deal with the glue smell and fog when the machine is working, and when the machine stop, the spray glue device seal off to prevent glue volatilize.

规格表 Specifications

型号	Model	JL-RP8050热熔胶数控喷胶机	JL-RP8050
工作电压	Voltage	AC220V	220V
额定功率	Power	1.25kw	1.25kw
外形尺寸	Dimensions	1400x1200x1700mm	1400mm*1200mm*1700mm
喷胶范围	Working area	800x 500mm	800mm*500mm
X轴驱动电机	The X axis drive motor	57JSFM1430P系列伺服电机	57 JSFM1430P Series servo motor
Y轴驱动电机	The Y axis drive motor	57JSFM1430P系列伺服电机	57 JSFM1430P Series servo motor
抽风方式	Take out wind way	风筒式轴流抽风机	Wind tube axial flow fan
下枪方式	Spray gun downward way	气缸下枪\手动调节	Cylinder air pressure or manual
最大速度	Maximum speed	50mm/S	50mm/S

产品特点 Application Features

主要用途: 用于手袋，银包成品着色的烘干，杀菌。

主要特点:

- 1.用于各种皮带着色后的烘干，特别可用于手袋成品的着色后的烘干。
- 2.双层流水线设计，烘干时间更长，使多次着色后，更易烘干。
- 3.内置紫外线杀菌灯，在烘干的同时，可对成品进行杀菌。
- 4.烤箱温度可调，输送带速度可调，可针对不同产品烘干要求进行合理的调节。

MAIN APPLICATION:

The main use of handbags, wallets and finished coloring drying, sterilization.

MAIN FEATURES:

1. for drying of a variety of belts, especially for the coloring of the finished products of the handbag.
2. double layer assembly line design, drying time longer, making multiple coloring, more easy to dry.
3. built-in ultraviolet bactericidal lamp, in the drying at the same time, can be sterilized for the finished product.
4. oven temperature and conveyor belt speed can both be adjustable for different products drying requirements.


规格表 Specifications

型号	Model	JL-S9300
额定电压	Rated voltage	AC380V
额定功率	Rated power	15KW
烤箱内部尺寸	Oven internal size	2700mm*950mm*550mm
外形尺寸	Outline dimension	9300mm*1200mm*1700mm



JL-S5000 双层流水线烘干机（散边油边）


JL-S5000 Double assembly line dryer(parts and components)

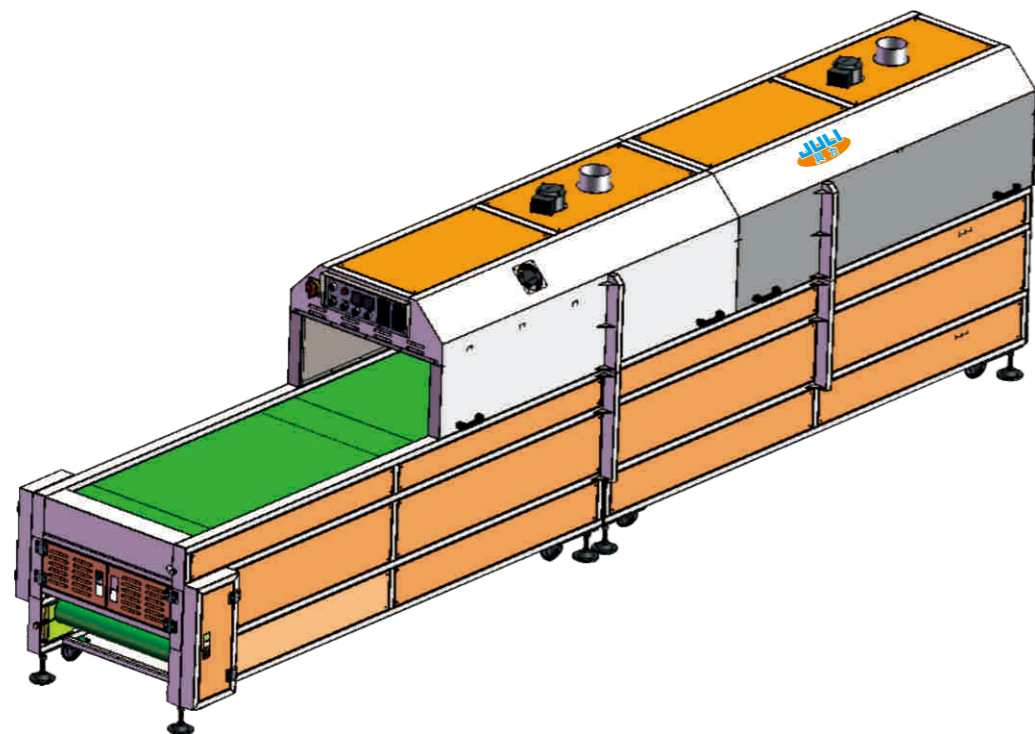

——专利产品 仿冒必究——

JL-ZN1240 智能流水线

JL-ZN1240 Smart Pipeline

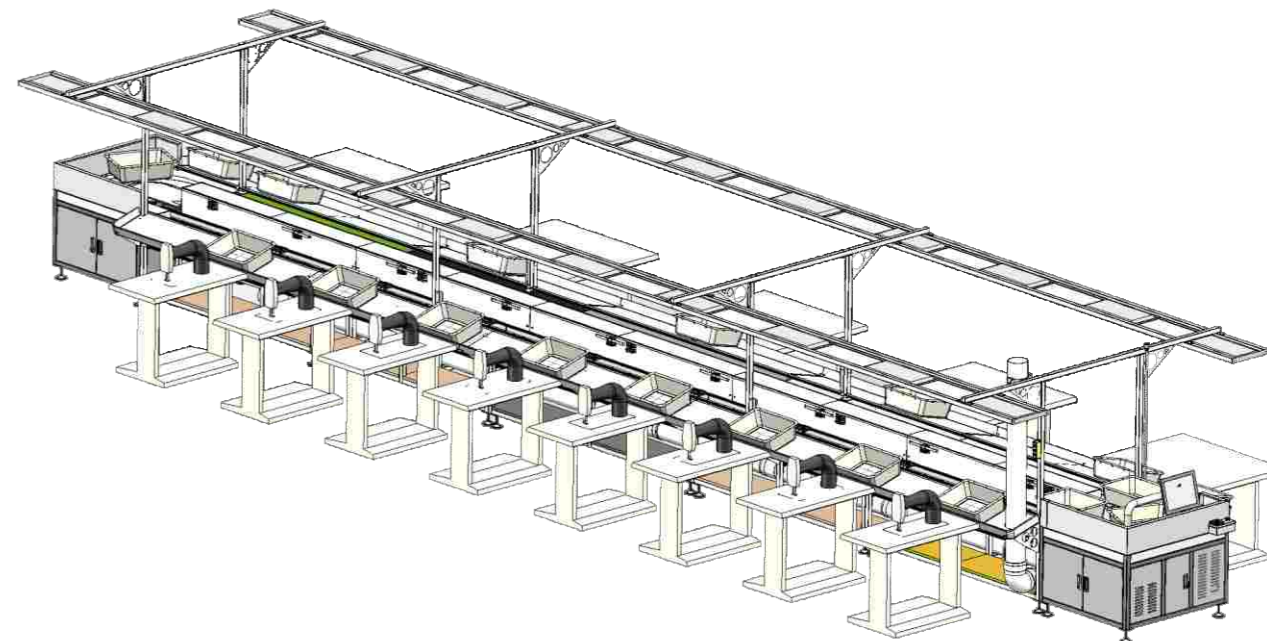

——专利产品 仿冒必究——

产品特点 Application Features

主要用途:

用于手袋，银包等半成品着色后的烘干，杀菌。

主要特点:

- 1.用于各种皮带着色后的烘干，特别可用于手袋半成品的着色后的烘干。
- 2.双层流水线设计，烘干时间更长，使多次着色后，更易烘干。
- 3.内置紫外线杀菌灯，在烘干的同时，可对半成品进行杀菌。
- 4.烤箱温度可调，输送带速度可调，可针对不同产品烘干要求进行合理的调节。

MAIN APPLICATION:

Used for drying and sterilizing semi-finished products such as handbags, silver bags and so on.

MAIN FEATURES:

1. for drying of a variety of belts, especially for the coloring of the finished products of the handbag.
2. double layer assembly line design, drying time longer, making multiple coloring, more easy to dry.
3. built-in ultraviolet bactericidal lamp, in the drying at the same time, can be sterilized for the semi-finished product.
4. oven temperature and conveyor belt speed can both be adjustable for different products drying requirements.

规格表 Specifications

型号	Model	JL-S5000
额定电压	Rated voltage	AC380V
额定功率	Rated power	7KW
烤箱内部尺寸	Oven internal size	1700mm*650mm*300mm
外形尺寸	Outline dimension	9300mm*1200mm*1700mm

产品特点 Application Features

- 1.智能识别:本设备通过RFID识别物料箱，自动分配物料箱到匹配的工位，节省人力物力。
- 2.自动统计:每个工位每个班次的产量自动及时统计上传到电脑，方便绩效考核，也为以后工序优化有数据上的直观表现。
- 3.自动传送:物料箱通过链条带动平面循环运动，每个料箱会依次经过设备两侧的工位，RFID读卡器识别到相匹配的料箱时料箱会暂时停止前进，推箱机构会将相匹配的料箱推送至相应工位，已达到自动分配物料的目的。
- 4.工序工位编排灵活:RFID读卡器识别的是物料箱里的RFID卡片，每张卡片上的识别信息是可以编辑的，这样就能让物料箱停在制定的工位了。
- 5.节省车间空间:减少物料小车周转分派的，节省车间周转空间。

1.Intelligent identification: This equipment recognizes the material box through RFID, allocates the material box to the matching station automatically, saves manpower and material resources.

2. Automatic statistics: The output of each shift of each station is automatically uploaded to the computer in time for the convenience of performance appraisal and the visual performance of the data for the optimization of the process in the future.

3. Automatic transmission: The material box drives the plane circulation movement through the chain, each material box passes through the stations on both sides of the equipment in turn, when the RFID card reader recognizes the matching material box, the material box will temporarily stop advancing, and the push box mechanism will push the matching material box to the corresponding station. The automatic distribution of materials has been achieved.

4. The process station is flexible: The RFID card reader identifies the RFID card in the material box, and the identification information on each card can be edited so that the material box can be parked at the designated station.

5. Save workshop space: reduce material car turnaround distribution, save workshop swing space.

规格表 Specifications

型号	Model	JL-ZN1240
工作电压	Voltage	380V/2.5kw
外形尺寸	Detentions	12400mm*1800mm*1900mm
净重	Net weight	2000kg



JL-S3900 自动流水线烘干机

JL-S3900 Automatic assembly line drying machine



JL-K005C 自动旋转红外烤箱

JL-K005C Automatic rotating infrared oven



——专利产品 仿冒必究——

——专利产品 仿冒必究——

产品特点 Application Features

主要用途:
用于皮料油边着色后的烘干。
适用范围:
适用于皮料散件、带五金配件、大面油边着色后的烘干。
主要特点:
1). 手动、自动切换简单，操作便捷。
2). 输送带速度可根据实际烘干效果进行调节。
3). 采用智能调节温度，红外线穿透烘干，烘干速度快，效果佳。

MAIN APPLICATION: It use to drying after material painting edge.
SUITABLE RANGE: It suitable for leather parts, hardware parts, big size material etc.
WORKING AREA: The oven length is 2400mm, width is 900mm.
PRODUCT FEATURE:
1.It have automatic control system, the control between manual and automatic is simple to change, the operation is convenient.
2.The assembly line speed can be adjust according to the drying effect.
3.Use Infrared penetration drying, intelligent temperature adjustment, has excellent drying effect.

规格表 Specifications

型号	Model	JL-S3900
工作电压	Voltage	380V
额定功率	Power	6.5kw
外形尺寸	Detentions	3900mm*900mm*1400mm
烤箱尺寸	Oven size	2400mm*900mm

产品特点 Application Features

主要用途: 适用于手袋肩带、手挽、饰品皮条、皮带等材料的涂边着色后的烘干
工作范围: 可用于20cm~120cm的材料烘干
主要特点:
1.采用进口红外线灯管升温，穿透烘干效果显著，适用于各种不同配件的油边烘干，操作简单，烘干效果佳；
2.精确的双时间控制，间歇运行可调节，操作简单；
3.运行速度可调，精确控制烘干时间；
4.合理的人性化设计，配备自动卸料装置，简化员工操作且适应不同长度的皮料；
5.箱内热量循环利用，节省能耗。

MAIN APPLICATION: It use for drying material after painting edge, it's suitable for handbag handle, shoulder, leather of ornament, belts etc.
WORKING AREA: It can be used for 20cm-120cm material drying
MAIN ADVANTAGE:
1.Adopt the import infrared lamp to heating-up, penetrably drying effect is remarkable, and it also easy to operation, suitable for different small material drying after painting edge,
2.The precise double time control, the intermittence running time can be adjusted, it is simple to operation;
3.The running speed can be adjusted, can precise control drying time;
4.With humanized design, equipped with automatic unloading device, simplify the employees operation and the unload frame height is adjustable, can adapt to the different length of leather material;
5.The heat in the oven can be use circulate, it can saving energy, reducing the cost.

规格表 Specifications

型号	Model	JL-K005C自动旋转红外线烤箱
工作电压	Voltage	380V
额定功率	Power	7.5kw
外形尺寸	Dimensions	2000mm*1550mm*2080mm



JL-Q003 全自动胶通裁切机

JL-Q003 Automatic glue pipe cutting machine



——专利产品 仿冒必究——

JL-TX5250 自动修正机

JL-T900 Automatic correction machine



——专利产品 仿冒必究——

产品特点 Application Features

主要用途: 用于手袋挽带胶桶的裁切成型。
工作范围: 根据不同胶桶的尺寸, 可自行设定。
主要特点:

1. PLC可编程序控制, 胶桶裁切长度一致。
2. 裁切胶通规则, 形状一致, 折弯位厚薄一致。
3. 个性化设定, 可根据不同手挽的需要, 设定不同的裁切长度, 适应不同的需要。
4. 设备运行稳定, 较传统人工裁切更安全可靠, 降低劳动强度。
5. 裁切速度可设定, 大大提升工作效率, 叫传统人工裁切, 提升2~3倍, 一人多机操作, 更省时省工。

MAIN APPLICATIONS: It is suitable to cut the glue pipe which is use for handbag handle.

WORKING AREA: It can be set by oneself according to different glue pipe size.

PRODUCT FEATURE:

1. Use PLC to control machine run, each PVC tube has the same cutting length size.
2. Each glue pipe will be cut in the same specification, shape and thickness as you set.
3. It has personalized settings that could set the cutting size basis on different handbag handle request, to adapt to the different requirements.
4. Stable running of the equipment, more safe and reliable than traditional labor cutting, reduce labor cost.
5. The speed of cutting could be set. Could improve the efficiency two or three times than traditional technology and the shape more beautiful, one person could operate more than one machine, save the production time and labor cost.

规格表 Specifications

型号	Model	JL-Q003
工作电压	Voltage	220V
外形尺寸	Dimension	1400mm*1000mm*1800mm
机械重量	Net weight	420kg

产品特点 Application Features

主要用途: 适用于手袋、鞋业、皮具等相关行业材料的复
工作范围: 最大材料500mm*500mm

主要优点:

1. 替代啤机, 只适合单种规格刀模生产, 本设备可兼顾多种刀模多人操作。实现简单快捷、高效的生产效率。
2. 相对于传统技术, 本设备提高安全系数, 减少工商事故, 降低安全隐患。
3. 循环工作托盘, 可供多人多种刀模同时裁断, 采用触摸屏控制, 简洁直观, 可对液压时间, 公称压力, 下压高度进行调节。
4. 将多次贴合工序集中在—台设备上同时进行, 提高生产效率, 降低劳动强度。

Main application: Suitable for materials in handbags, footwear, leather goods and other related industries

Scope: Max material 500mm*500mm

Main advantages:

1. Instead of beer machine, it is only suitable for the production of single specification cutter die. This equipment can take into account multiple cutter dies and multi-person operation. Realize simple, fast and efficient production efficiency.
 2. Compared with traditional technology, this equipment improves safety factor, reduces industrial and commercial accidents and reduces potential safety hazards.
 3. Cyclic operation tray, which can be cut by multiple cutters and dies at the same time; Adopt touch screen control, which is simple and intuitive; It can adjust hydraulic time, nominal pressure and press-down height
- Multiple bonding processes are concentrated on one equipment at the same time, which improves production efficiency and reduces labor intensity

规格表 Specifications

型号	Model	JL-TX52050
额定电压	Rated voltage	AC380V-50Hz
额定功率	Rated power	8.5KW
机械净重	Net weight of machinery	1800KG
最大工作范围W*L	Maximum scope of work	500*500mm
循环托盘数量	Number of circulating pallets	10G个
托盘范围	Pallet range	520*500mm
油缸压力	Cylinder pressure	10T
设备尺寸	Equipment size	3363*1136*1808mm



JL-886 双头强力标准型高周波机

JL-886 double-head powerful standard high frequency welding machine



JL-DZ003 底围贴合机

JL-DZ003 bottom hem laminating machine



产品特点：
1.双工位循环工作，效率提高；
2.贴合折边的模具可调，适应不同尺寸的手袋底围折边贴合；
3.标准度高，PLC控制，位置精度较高。

JL-166 四轮双边磨边机

JL-166 four-wheel double-side edge grinding machine



适用于各种男女皮带、直条带、背带双边磨边及抛光、打蜡作业，四轮两段式磨边，提高效率60%，提高产量，减少人工（配有无限变速吸尘设备），可安装不同的磨轮，磨出理想的效果。

JL-116 单边打磨机(调速)附吸尘

JL-116 single-side grinding machine (adjust the speed)with dust extraction



JL-SX003 锁线机

JL-SX003 sewing machine



JL-YB100 压薄机

JL-YB100 thinning machine



JL-D003C 气动冲孔机

JL-D003C pneumatic punching machine



JL-SM860V 双头打磨机

JL-SM860V double-head grinding machine




JL-DM200 立式打磨机

JL-DM200 vertical grinding machine



JL-D003W 自动打尾制机

JL-D003W automatic tail buckle making machine

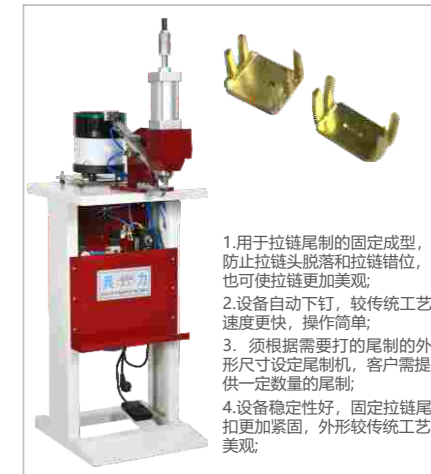

1.用于拉链尾制的固定成型，防止拉链头脱落和拉链错位，也可使拉链更加美观；
2.设备自动下钉，较传统工艺速度更快，操作简单；
3.须根据需要打的尾制的外形尺寸设定尾制机，客户需提供一定数量的尾制；
4.设备稳定性好，固定拉链尾扣更加紧固，外形较传统工艺美观。

JL-YB150 压薄机(平移式)

JL-YB150 Thinning machine (translational type)



JL-YB100A 压薄机

JL-YB100A Thinning machine



JL-YB80 手动油边机

JL-YB80 manual edge painting machine



JL-Y003 双边油边机

JL-Y003 double-side edge painting machine



适用于皮带、背带两边同时上色，附调速装置。

型号	JL-117
马力	1/8HP
外形尺寸	460x580x1520mm
重量	70kg

JL-DY003 单边油边机

JL-DY003 single-side edge painting machine





JL-126 银包修正机
 JL-126 wallet trimming machine



JL-MD003 单头铆钉机
 JL-MD003 single-head riveting machine



JL-ZB450 自动折边机
 JL-ZB450 automatic edge folding machine



JL-YL003 气动压拉链头机
 JL-YL003 pneumatic zipper slider pressing machine



JL-PZ003 平角机
 JL-PZ003 corner trimming machine



JL-SL80A 双轮电动油边盒
 JL-SL80A double-wheel electric edge painting box



JL-YX120 手动压线机
 JL-176 manual edge creasing machine



JL-176A 万能上胶机
 JL-176A universal gluing machine



JL-176 万能上胶机
 JL-176 Universal glue machine



JL-4V21006B



JL-30A



JL-40A



JL-T200W



JL-DTK4818L01



JL-CD100-E



JL-DH48S-3Z



精研

JL-200W-180P



JL-LRS-50-24



JL-LA38



JL-RK-05N1



JL-HW01



JL-10DA



JL-LA38(D10II)



JL-AW2000



JL-AR2000



JL-TFS201



JL-Y40



JL-4V330



JL-4V21006A



JL-4V21008A



JL-350-48



JL-YLT8L



JL-WA101



JL-CS10120



JL-121-2



JL-WA101B



JL-PZ14



JL-WA-101A



JL-2520



JL-HTD3M-9-252 JL-HTD3M-9-309 JL-HTD5M-25-530 JL-HTD3M-19-687 JL-HTD3M-687




JL-YB404 JL-YU404B JL-YZ003B JL-CZ660 JL-CZC70



JL-JG10 JL-HTB3M-15 JL-500W JL-K100 JL- 螺纹



JL-CZC71 JL-YZ003 JL-PZ8 JL-PZ04 JL-PZ10

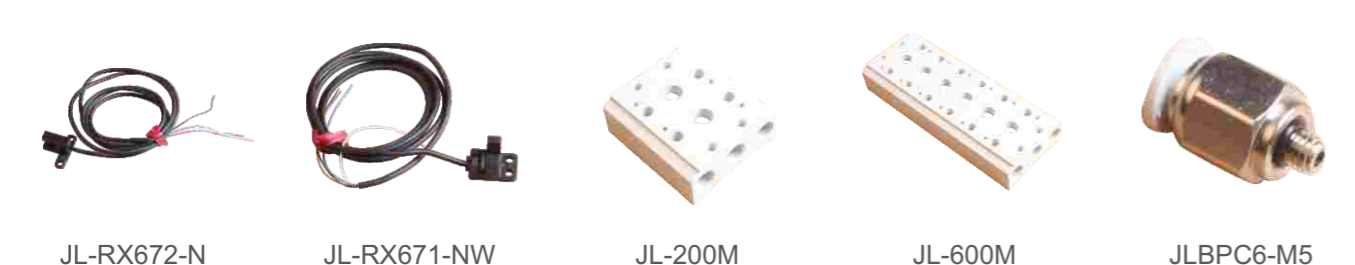

JL-RX672-N JL-RX671-NW JL-200M JL-600M JLBPC6-M5



JL-PZ6 JL-YZ033C JL-YL10-20 JL-YL10-16 JL-YL10-40



JL-BPC08-02 JL-BPL6-02 JL-BPL8-02 JL-BPL6-01 JL- 螺纹



JL-YL8-32 JL-YL6-15 JL-YL10-28 JL-YL8-22 JL-YL5-15



JL-CL10 JL-CL20 JL-XL20 JL-ZC30 JL-SL80AL



JL-CL10-18 JL-TX620 JL-TX420 吸盘塑料弯头 φ4φ6φ8 蠕动泵软管



JL-Y003XL JL-Y003CL JL-TYC30 JL-TYX30 JL-RD100



JL-PZ-15 JL-TS-15